

# housings Plus Hot 3P SX

for cartridges with standard flat seals



Medium Junior Master Senior

### APPLICATIONS

Filtration of hot water with neutral pH and drinking water.

**Domestic use:** filtration and treatment of drinking water, protection of taps, boilers, washing machines, and other installations.

**Technical use:** pre-filtration, micro-filtration; protection of pumps, heating systems, softeners, demineralising and chlorine-removing appliances, reverse osmosis units.

### WORKING CONDITIONS

Max working pressure \_\_\_\_\_ 8 BAR

Max working temperature \_\_\_\_\_ 80°C

### SPECIFICATIONS

Non-toxic materials, suitable for drinking water.


**Head and ring nut and bowl:** reinforced polyamide.

**O-ring:** EPDM.

**Breather-valve:** body polypropylene, O-ring EPDM.

R06-05/11. Subject to change without notice

Cartridge height	housings with opaque bowl AB IN/OUT plastic FP female threads	IN/OUT threads	mm	
			A	B
5"	Medium Plus Hot 3P MFP SX AB	1/2"	191	133
5"	Medium Plus Hot 3P AFP SX AB	3/4"	191	133
5"	Medium Plus Hot 3P BFP SX AB	1"	197	145
7"	Junior Plus Hot 3P MFP SX AB	1/2"	241	133
7"	Junior Plus Hot 3P AFP SX AB	3/4"	241	133
7"	Junior Plus Hot 3P BFP SX AB	1"	247	145
10"	Senior Plus Hot 3P MFP SX AB	1/2"	315	133
10"	Senior Plus Hot 3P AFP SX AB	3/4"	315	133
10"	Senior Plus Hot 3P BFP SX AB	1"	321	145
20"	Master Plus Hot 3P MFP SX AB	1/2"	571	133
20"	Master Plus Hot 3P AFP SX AB	3/4"	571	133
20"	Master Plus Hot 3P BFP SX AB	1"	577	145

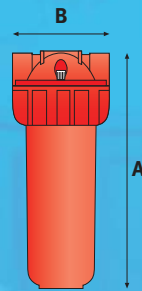

### CARTRIDGE SPECIFICATIONS

**FA SX HOT** filtering medium: polypropylene thread; inner core: reinforced polypropylene. Filter rates: 5-10-25-100 micron.

**CPP SX** filtering medium: melt-blown polypropylene micro-fibres. Filter rates: 1-5-10-25 micron.

**RA SX** filtering medium: stainless steel net; inner core and end caps: polypropylene. Filter rate 70 micron.

### VARIANT available on minimum quantity

**PP SX** melt-blown grooved cartridges.



FA SX HOT

CPP SX

RA SX



### accessories



-N- Spanner




-S- wall bracket



wall bracket screws

# housings Plus Hot S 3P BX

for quick-fit cartridges with double O-ring

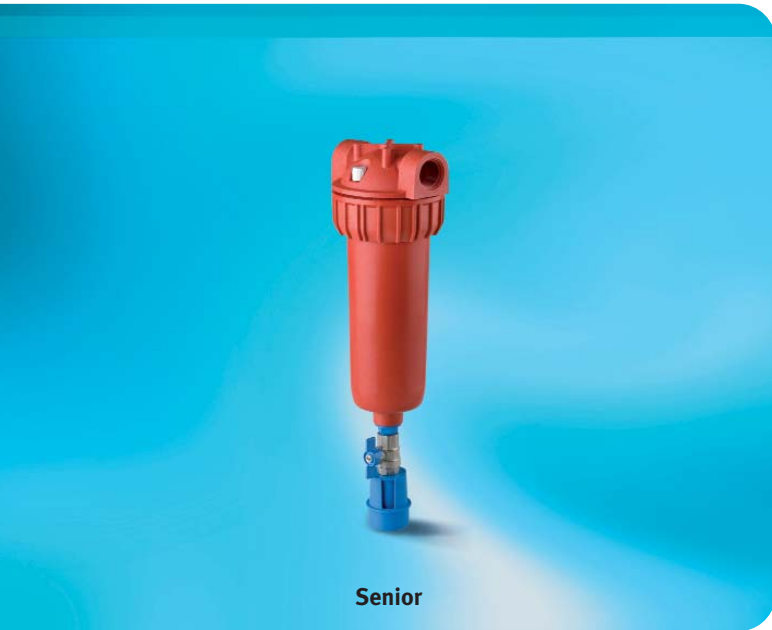

Senior

## APPLICATIONS

Filtration of hot water with neutral pH and drinking water.

**Domestic use:** filtration and treatment of drinking water, protection of taps, boilers, washing machines, and other installations.

**Technical use:** pre-filtration, micro-filtration; protection of pumps, heating systems, softeners, demineralising and chlorine-removing appliances, reverse osmosis units.

## WORKING CONDITIONS

Max working pressure \_\_\_\_\_ 8 BAR

Max working temperature \_\_\_\_\_ 80°C

## SPECIFICATIONS

Non-toxic materials, suitable for drinking water.

**Head and ring nut and bowl:** reinforced polyamide.

**O-ring:** EPDM.

**Breather-valve:** body polypropylene, O-ring EPDM.


**Discharge ball-valve:** CW 614N BRASS.

**Drain funnel:** reinforced polypropylene.

**Plastic nipple:** reinforced polypropylene.

**Discharge hose-holder:** reinforced polyamide.

Cartridge height	housings with opaque bowl AB IN/OUT plastic FP female threads	IN/OUT threads	mm	
			A	B
10"	Senior Plus Hot S 3P MFP BX AB	1/2"	355	133
10"	Senior Plus Hot S 3P AFP BX AB	3/4"	355	133
10"	Senior Plus Hot S 3P BFP BX AB	1"	361	145

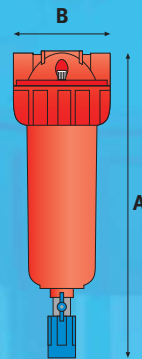

## CARTRIDGE SPECIFICATIONS

**CPP BX** filtering medium: melt-blown polypropylene micro-fibres. Filter rates: 1-5-10-25 micron.

**RA BX** filtering medium: stainless steel net; inner core and end caps: polypropylene. Filter rate 70 micron.

## VARIANTS available on minimum quantity

**Discharge hose holder** in brass.

**Master (20") housings.**

**FA HOT BX** cartridges.

**PP BX** melt-blown grooved cartridges .

## accessories



-N- Spanner



-S- wall bracket



wall bracket screws



**DRAIN FUNNEL**  
Back-flow  
preventing device  
UNI EN 1717/2002

R06-05/11. Subject to change without notice